











Tip priključka	Kontakti N/O = Normalno otvoreni N/C = Normalno zatvoreni	Nazivna radna struja		Nazivna struja, otvoreno pri 60 °C	Šifra	Redosled kontakata
		AC-15				
		220 V	380 V			
		230 V	400 V			
		240 V	415 V			
		$I_e$	$I_e$	$I_{th}$		
		A	A	A		

### Osnovni uređaji sa blokadom naspramnih kontakata

	Priključci sa vijkom	4 N/O	–	6	4	16	40E		
		3 N/O	1 N/C					31E	
		2 N/O	2 N/C					22E	
	Priključci sa oprugom	4 N/O	–	6	4	16	40E		
		3 N/O	1 N/C					31E	
		2 N/O	2 N/C					22E	



Moeller NK1210+2100+2300-1153GB-INT

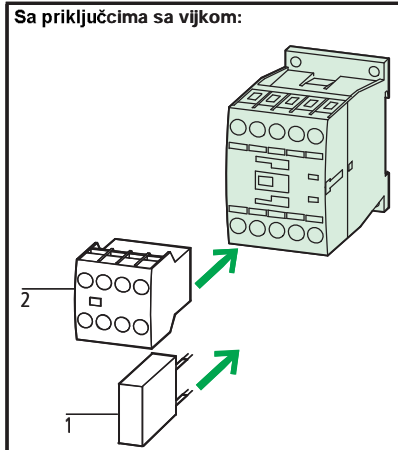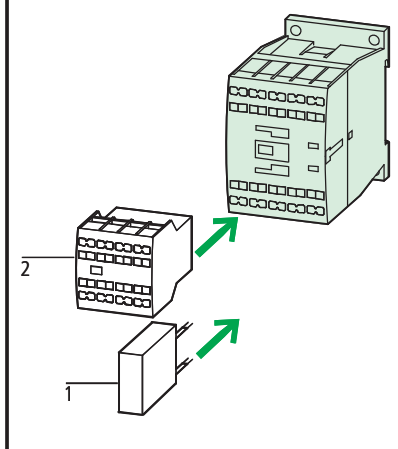Mogućnost kombinacije sa dodatnim kontaktnim modulom	Napajanje AC		Napajanje DC		Kom. u pak.	Napomene
	Šifra dela Kat. broj	Cena vidi cenovnik	Šifra dela Kat. broj	Cena vidi cenovnik		
DILA-XHI(V)...	DILA-40(230V50HZ) 276329		DILA-40(24VDC) 276344		1	<b>Sa priključcima sa vijkom:</b>  <b>Oprema</b> 1 Prigušnica → 2/22 2 Pomoćni kontakt → 2/12 Ostali upravljački naponi → 1/9
	DILA-31(230V50HZ) 276364		DILA-31(24VDC) 276379			
	DILA-22(230V50HZ) 276399		DILA-22(24VDC) 276414			
DILA-XHIC(V)...	DILAC-40(230V50HZ) 276441		DILAC-40(24VDC) 276456		1	<b>Sa priključcima sa oprugom:</b>  <b>Oprema</b> 1 Prigušnica → 2/22 2 Pomoćni kontakt → 2/12 Ostali upravljački naponi → 1/9
	DILAC-31(230V50HZ) 276473		DILAC-31(24VDC) 276488			
	DILAC-22(230V50HZ) 276505		DILAC-22(24VDC) 276520			



Brojevi kontakata prema EN 50011

Oznake na priključcima kalema prema EN 50005

Pomoćni kontaktori sa DC napajanjem imaju ugrađeno prigušno kolo.