


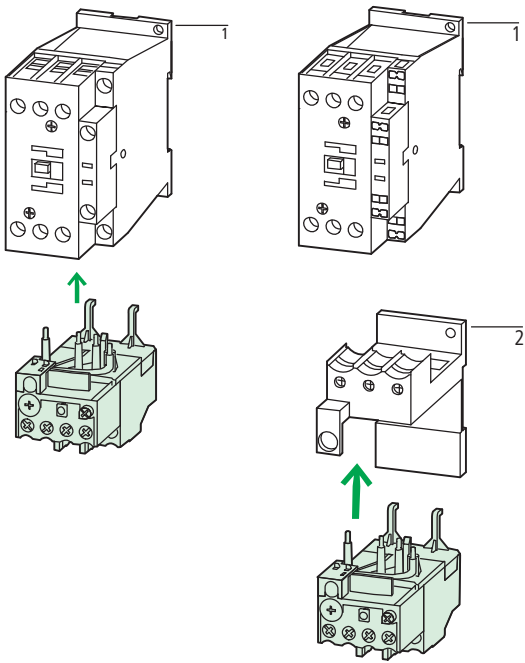


Moeller NK1210+2100+2300-1153GB-INT

Broj dela Kat. broj	Cena vidi cenovnik	Kom. u pak.	Napomene	
<p>ZB12-0,16 278431</p> <p>ZB12-0,24 278432</p> <p>ZB12-0,4 278433</p> <p>ZB12-0,6 278434</p> <p>ZB12-1 278435</p> <p>ZB12-1,6 278436</p> <p>ZB12-2,4 278437</p> <p>ZB12-4 278438</p> <p>ZB12-6 278439</p> <p>ZB12-10 278440</p> <p>ZB12-12 278441</p> <p>ZB12-16 290168</p>		1	<p>Bimetal: klasa aktiviranja 10 A Zaštita od kratkog spoja: Obratiti pažnju na maksimalnu dozvoljenu snagu osigurača kontaktora za direktnu montažu na uređaj.</p> <p>Namenjen za zaštitu EEx e-motora. Uverenje EC testa prototipa dostavlja se po zahtevu.</p> <p></p> <p>PTB 04 ATEX 3022</p> <p>Vidi priručnik AWB2300-1545D/GB</p>	<p>Ugradnja direktno na kontaktor</p>  <p>1 Kontaktor → 2/6</p>
<p>ZB32-0,16 278442</p> <p>ZB32-0,24 278443</p> <p>ZB32-0,4 278444</p> <p>ZB32-0,6 278445</p> <p>ZB32-1 278446</p> <p>ZB32-1,6 278447</p> <p>ZB32-2,4 278448</p> <p>ZB32-4 278449</p> <p>ZB32-6 278450</p> <p>ZB32-10 278451</p> <p>ZB32-16 278452</p> <p>ZB32-24 278453</p> <p>ZB32-32 278454</p>		1	<p>Bimetal: klasa aktiviranja 10 A Zaštita od kratkog spoja: Obratiti pažnju na maksimalnu dozvoljenu snagu osigurača kontaktora za direktnu montažu na uređaj.</p> <p>Namenjen za zaštitu EEx e-motora. Uverenje EC testa prototipa dostavlja se po zahtevu.</p> <p></p> <p>PTB 04 ATEX 3022</p> <p>Vidi priručnik AWB2300-1545D/GB</p>	<p>Ugradnja direktno na kontaktor Odvojena ugradnja</p>  <p>1 Kontaktor 2 Podnožje</p> <p>→ 2/6 → 3/6</p>



Opseg

I_r

A



Redosled kontakta

Dodatni kontakti

N/O = Normalno otvoreni
N/C = Normalno zatvoreni

Za primenu sa:

Zaštita od kratkog spoja

Tip "1"
koordinacija

gG/gL




Tip "2"
koordinacija

gG/gL



ZB65, ZB150 Bimetalni

Osetljivost na nestanak faze usaglašena sa IEC/EN 60947
Za direktnu ugradnju



6 – 10


10 – 16

16 – 24

24 – 40

40 – 57

50 – 65



1 N/O

1 N/C

DILM40,
DILM50,
DILM65,
DIULM40,
DIULM50,
DIULM65,
SDAINLM70,
SDAINLM90,
SDAINLM115

50

63

63

125

160

160

25


35

50

63

80

100



25 – 35

35 – 50

50 – 70

70 – 100

95 – 125

120 – 150

DILM80,
DILM95,
DILM115,
DILM150,
DIULM80,
DIULM95,
DIULM115,
DIULM150,
SDAINLM140,
SDAINLM165,
SDAINLM200,
SDAINLM260

125

160

250

315

315

315

100

125


160

200

250

250

Odvojena ugradnja



25 – 35


35 – 50

50 – 70

70 – 100

95 – 125

120 – 150



1 N/O

1 N/C

125

160

250

315

315

315

100

125

160

200

250

250

